



NCS-5D

DELEGATE UNIT



Overview





The NCS-5D is a desktop base discussion microphone unit designed as a delegate microphone for Novo Conference System. The microphone unit is engineered in high-quality aluminum alloy die cast housing. The delegate microphone connects to the NCS-110 central control unit via network category 5 cable. The unit includes a shotgun Gooseneck microphone with a cardioid unidirectional pickup capsule. The microphone comes with an illuminating ring at the bottom which indicates the active status. The delegate unit has a mute button to control its integrated microphone.

Key Features

- Integrated Gooseneck microphone with cardioid pickup capsule which provides clear and full sound quality, high sensitivity, and a good long-distance pick-up effect.
- Speaking status indicator: red when mute, green when speaking.
- Convenient loop through cabling via standard cat5 category.
- NCS-5C chairman unit has the priority to override all delegate units.
- Aluminum finished metallic die-cast body.

Technical Specifications

POLAR PATTERN	Cardioid Condenser
FREQUENCY RESPONSE	50Hz-20KHz
SENSITIVITY	-20dBV (+/-3dB) (0db=1Vpa,f=1Khz)
MAXIMUM INPUT SOUND PRESSURE LEVEL	110dB (THD < 5%, f=1KHz)
SIGNAL TO NOISE RATIO (A-WEIGHTED)	> 100dBA (THD<1%, f=1 KHz)
DISTORTION	<0.1%
POWER SUPPLY	24V DC (supplied by the controller)
POWER CONSUMPTION	0.72W
UNIT INTERFACE	RJ45 network input
WEIGHT	about 670g
DIMENSION (MM)	147 (L) X 15 (W) x 218(H)

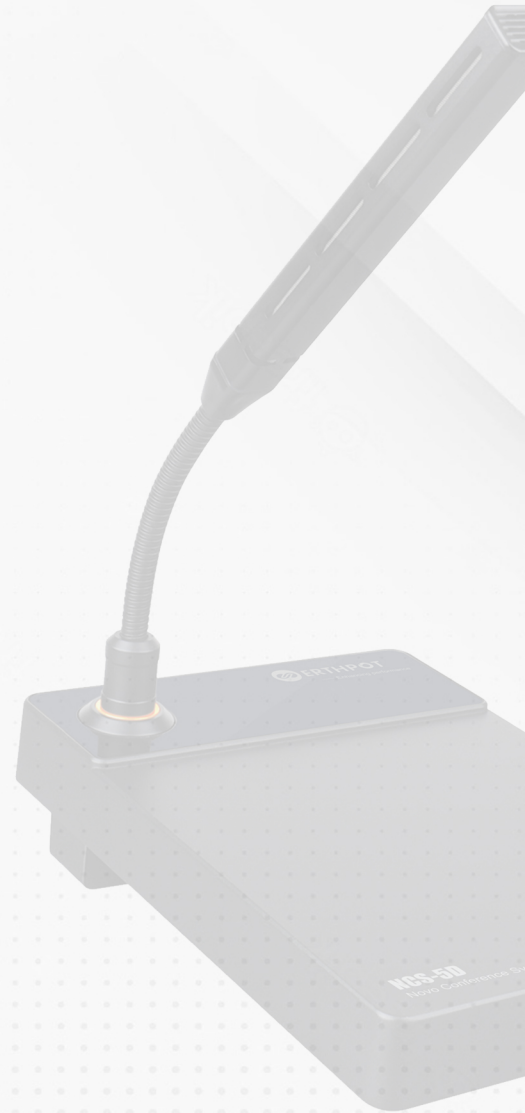

ERTHPOT ELECTRONICS PRIVATE LIMITED

A - 164, A Block, Noida Sector 63, Gautam Buddha Nagar
Uttar Pradesh Pin Code: 201301
info@erthpot.com